D-LINE®

Safe-D Fire Rated Clips
Features:Benefits Overview

- High-temperature rated Safe-D Clips can hold full-cable loads for 2 hours at 930°C

- All Safe-D Clips are fully tested as BS5839 part 1 compliant; by Exova Warrington Fire... copy certification on request

- 20mm wide side-tabs & pliable gauge combine for quickest and easiest folding

- Smooth, rounded edges protect soft-skin cables

- Passivated non-corrosive coating on all faces & edges

- 5mm diameter hole accepts all popular fixings

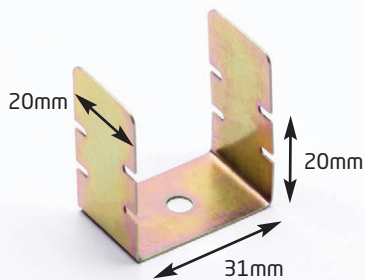- Ideal for ceiling voids or popular PVC trunkings 25mm – 50mm widths

Safe-D30

20mm

23mm

23mm base for popular 2 cable combinations. Ideal for 2x 2.5mm T&E or 2x 1.5mm FP Cables

Suitable for direct to surface fitting

Safe-D40

20mm

20mm

31mm

Can fit 32-40mm trunking bases
folds to max 20mm height

Also ideal for Dado trunking

Safe-D50

20mm

30mm

46mm

Can fit up to 50mm trunking bases
Folds to max 30mm height, so ensuring space for air circulation within 50x50mm trunking