

Category 6A F/FTP Cable - LSFROH - International

Siemon's category 6A / Class E_A 4-pair F/FTP cable supports channel performance exceeding ANSI/TIA and ISO/IEC category 6A requirements. This cable uses a 5-foil screened design consisting of 4 individual foils wrapped pairs plus an overall foil shield. When combined with our shielded Z-MAX® 6A connectivity, the end result is a channel capable of supporting 10GBASE-T operation over 100-meter, 4-connector topologies. In addition, the fully shielded construction ensures virtually zero alien crosstalk. This cable has been formulated to meet IEC 60332-3-25 which is a more demanding flammability specification for bundled cables.




COMPLIANCE

- ISO/IEC 11801 Ed 2.2 (Class E_A)
- ANSI/TIA-568-C.2 (Category 6A)
- IEC 61156-5 Ed 2.0 (Category 6A)
- IEC 60332-3-25, IEC 60754-2, IEC 61034
- EN 50399 Class C_{ca}S_{1a}d_{2a1}

CABLE CONSTRUCTION

- Nominal Cable Diameter: 7.2mm (0.28 in.)
- Conductor Insulation: Foam PE
- Material: LSFROH
- Drain Wire: (Solid Tinned Copper)
- Aluminium Foil Overall Shield
- Conductor: 23 AWG (0.56mm) Solid Copper
- Aluminium Foil Pair Shield

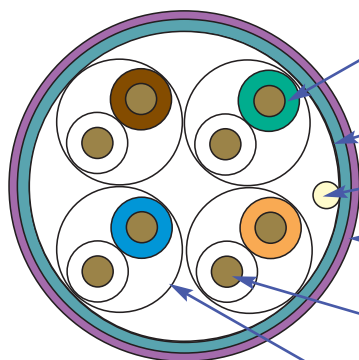

Conductor Insulation

- Foam PE
1.28 +/- 0.5mm

Aluminum Foil Overall Shield

Drain Wire

- Solid tinned copper

Outer Jacket

- Material - LSFROH
O.D. = 7.2mm (0.28 in.) ± 0.3mm

Conductor

- 23AWG solid copper
0.56mm (0.021 in.)

Aluminum Foil Pair Shield

Product Information

ELECTRICAL SPECIFICATIONS

DC Resistance	73.2Ω/Km max. @20°C
DC Resistance Unbalance	2%
Mutual Capacitance	56 nF/km (nom.) @ 1KHz
Capacitance Unbalance	<1600 pF/km
Characteristic Impedance Function Fitted (ohms)	100 ± 15% @ 100 MHz
NVP	74%
TCL	40-10 log(f) dB
Coupling Attenuation	≤55 dB
Delay Screw	20ns/100m max.

PHYSICAL PROPERTIES

	LSOH
Pulling Tension (max)	110N (25 lbf)
Bend Radius (min)	50mm (2.0 in.)
Installation Temperature	0 to 50°C (32 to 122°F)
Operating Temperature	-20 to 75°C (-4 to 167°F)

TRANSMISSION PERFORMANCE

WORSE CASE

SIEMON TYPICAL

Frequency (MHz)	Insertion Loss (dB)		NEXT (dB)		PSNEXT (dB)		ACR (dB)		PSACR (dB)		ACR-F (dB)		PSACR-F (dB)		Return Loss (dB)		Propagation Delay (ns)	
	Worse Case	Siemon Typical	Worse Case	Siemon Typical	Worse Case	Siemon Typical	Worse Case	Siemon Typical	Worse Case	Siemon Typical	Worse Case	Siemon Typical	Worse Case	Siemon Typical	Worse Case	Siemon Typical	Worse Case	Siemon Typical
1	2.1	1.8	75.3	93.5	73.3	92.7	73.2	93.1	71.2	90.9	73.3	97.1	71.3	93.7	20.0	23.9	570.0	448
4	3.8	3.6	66.3	98.3	64.3	95.9	62.5	94.7	60.5	92.4	61.3	96.4	59.3	93.9	23.0	27.3	552.0	442
10	5.9	5.5	60.3	87.5	58.3	87.2	54.4	82.0	52.4	81.6	53.3	86.4	51.3	85.7	25.0	32.7	545.4	439
16	7.5	7.1	57.2	83.4	55.2	82.9	49.8	76.3	47.8	75.8	49.2	81.2	47.2	81.1	25.0	31.2	543.0	438
20	8.4	8.0	55.8	77.4	53.8	76.7	47.4	69.4	45.4	68.7	47.3	75.0	45.3	74.4	25.0	32.4	542.0	437
31.25	10.5	10.1	52.9	81.1	50.9	80.4	42.4	71.0	40.4	70.3	43.4	73.5	41.4	73.1	23.6	30.0	540.4	436
62.5	15.0	14.3	48.4	87.1	46.4	84.1	33.4	72.7	31.4	69.8	37.4	74.2	35.4	73.1	21.5	31.8	538.6	435
100	19.1	18.2	45.3	80.6	43.3	79.4	26.2	62.3	24.2	61.1	33.3	68.3	31.3	66.8	20.1	31.3	537.6	435
200	27.6	25.8	40.8	74.4	38.8	71.2	13.2	48.5	11.2	45.4	27.3	63.9	25.3	62.4	18.0	31.3	536.5	434
250	31.1	28.9	39.3	74.4	37.3	7.8	8.3	45.9	6.3	42.7	25.3	61.0	23.3	59.5	17.3	29.5	536.3	434
300	34.3	31.9	38.1	72.5	36.1	69.8	3.9	41.9	1.9	37.8	23.8	62.0	21.8	60.3	17.3	26.2	536.1	434
400	40.1	37.2	36.3	68.9	34.3	65.7	-3.8	31.7	-5.8	28.4	21.3	54.6	19.3	52.3	17.3	26.2	535.8	434
500	45.3	41.6	34.8	65.9	32.8	64.0	-10.4	23.9	-12.4	22.1	19.3	55.9	17.3	53.8	17.3	28.0	535.6	434
550*	-	44.0	-	58.2	-	54.9	-	14.0	-	10.4	-	41.5	-	40.4	-	20.3	-	434
625*	-	46.2	-	57.6	-	56.5	-	11.2	-	9.3	-	41.5	-	39.8	-	22.6	-	434
750*	-	51.9	-	58.6	-	56.0	-	6.6	-	4.2	-	42.6	-	40.4	-	19.2	-	434

*Values for frequencies beyond 500 MHz are for information only.

All performance based on 100 meters (328 ft.).

Ordering Information

Part #	Description
9N6J4-A5.	LSFROH (IEC 60332-3-25), violet jacket, Class E _{ca} , D _{ca} , C _{ca} , 305m (1000 ft.) reel



Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters
North America
 Watertown, CT USA
 Phone (1) 860 945 4200

Regional Headquarters
Europe Russia Africa
 Chertsy, Surrey, England
 Phone (44) 0 1932 571771

Regional Headquarters
China
 Shanghai, P.R. China
 Phone (86) 215385 0303

Regional Headquarters
Latin America
 Bogota, Colombia
 Phone (571) 657 1950/51/52

Regional Headquarters
India Middle East
 Dubai, United Arab Emirates
 Phone (971) 4 3689743

Regional Headquarters
Asia Pacific
 Sydney, Australia
 Phone (61) 2 8977 7500

Siemon Interconnect Solutions
Watertown, CT USA
 Phone (1) 860 945 4213 US
 www.siemon.com/SIS