


REV	DESCRIPTION	DATE	ECN NO.
A1	INITIAL RELEASE	2024.01.26	

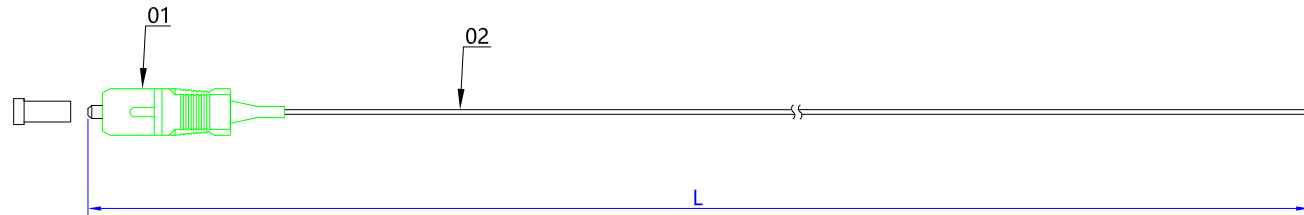

Technical Requirements

- 1.Fiber: G657A1 SingleMode.
- 2.Polishing type: SC/APC.
- 3.Insertion loss: ≤0.30dB.(1310/1550nm)
- 4.Return Loss: ≥60dB.(1310/1550nm)
- 5.Standards:
 - IEC 61300-3-35, endface inspection.
 - IEC 61300-3-4, IL measurement procedures.
 - IEC 61300-3-6, RL measurement procedures.
- 6.The length L is customized.

6			
5			
4			
3			
2	Ø0.9mm SM G657A1 Simplex Yellow LSZH Cable	L	
1	Ø0.9mm SC/APC SM Simplex Green Connector(Green Boot)	1	
NO.	DESCRIPTION	Q'TY	MAT'L NO.

CONFIDENTIAL		KOC Communication Co., Ltd.	
Information in this drawing is property of KOC and may not be copied, reproduced or disclosed to any third unexpected party without written consent by KOC.			
PART NAME		Ø0.9mm SC/APC Simplex Yellow G657A1 Pigtail	
PART NUMBER		/	
TOLERANCES		DRW NUMBER	D R A W N
ANGLE ±0.5° LINEAR TOLERANCE ±0.05 X.X			xiwei Zhang 2024.01.26
		MATERIAL	CHECKED
		N/L	Sidong Luo 2024.01.26
		COLOUR	APPROVED
		N/L	Kendy Lee 2024.01.26
			SCALE: 1.000
			UNIT: MM
			REV: A1 SHT: 1/1