


REV	DESCRIPTION	DATE	ECN NO.
A1	INITIAL RELEASE	2024.01.26	

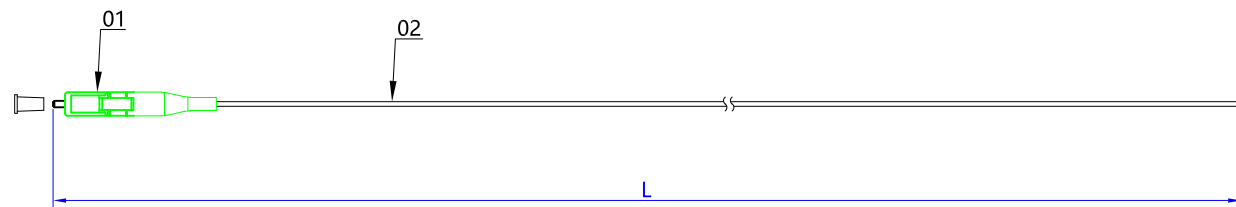

Technical Requirements

- 1.Fiber: G657A1 SingleMode.
- 2.Polishing type: LC/APC.
- 3.Insertion loss: ≤0.30dB.(1310/1550nm)
- 4.Return Loss: ≥60dB.(1310/1550nm)
- 5.Standards:
 - IEC 61300-3-35, endface inspection.
 - IEC 61300-3-4, IL measurement procedures.
 - IEC 61300-3-6, RL measurement procedures.
- 6.The length L is customized.

6			
5			
4			
3			
2	Ø0.9mm SM G657A1 Simplex Yellow LSZH Cable	L	
1	Ø0.9mm LC/APC SM Simplex Green Connector(Green Boot)	1	
NO.	DESCRIPTION	Q'TY	MAT'L NO.

CONFIDENTIAL		KOC Communication Co., Ltd.	
Information in this drawing is property of KOC and may not be copied, reproduced or disclosed to any third unexpected party without written consent by KOC.		PART NAME	Ø0.9mm LC/APC Simplex Yellow G657A1 Pigtail
		PART NUMBER	/
TOLERANCES ANGLE ±0.5° LINEAR TOLERANCE X.X ±0.05		DRW NUMBER	D R A W N xiwei Zhang 2024.01.26
		MATERIAL	CHECKED Sidong Luo 2024.01.26
		COLOUR	APPROVED Kendy Lee 2024.01.26
			SCALE: 1.000 UNIT: MM REV: A1 SHT: 1/1