


REV	DESCRIPTION	DATE	ECN NO.
△	INITIAL RELEASE	2024.01.25	



Tolerances unless otherwise specified	
Length	Tolerances
L≤0.5m	-0mm, +50mm
0.5m<L≤5m	-0mm, +100mm
5m<L≤20m	-0mm, +150mm
L>20m	+1%

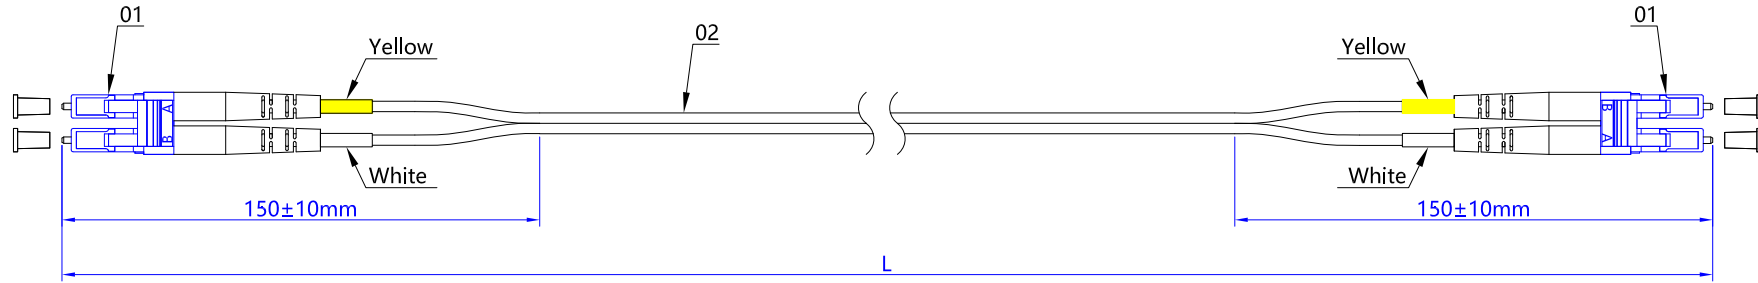

#### Technical Requirements

- 1.Fiber: G657A1 SingleMode.
- 2.Polishing type: LC/UPC.
- 3.Insertion loss: ≤0.30dB.(1310/1550nm)
- 4.Return Loss: ≥50dB.(1310/1550nm)
- 5.Standards:
  - IEC 61300-3-35, endface inspection.
  - IEC 61300-3-4, IL measurement procedures.
  - IEC 61300-3-6, RL measurement procedures.
- 6.The length L is customized.

6			
5			
4			
3			
2	Ø2.0mm SM G657A1 Duplex Yellow LSZH Cable	L	
1	Ø2.0mm LC/UPC SM Duplex Blue Connector(White Boot)	2	
NO.	DESCRIPTION	Q'TY	MAT'L NO.

<b>CONFIDENTIAL</b>		 <b>KOC Communication Co., Ltd.</b>	
Information in this drawing is property of KOC and may not be copied, reproduced or disclosed to any third unexpected party without written consent by KOC.		<b>PART NAME</b>	Ø2.0mm LC/UPC-LC/UPC Duplex G657A1 Patchcord
		<b>PART NUMBER</b>	/
<b>TOLERANCES</b>	<b>DRW NUMBER</b>	<b>D R A W N</b>	xiwei Zhang 2024.01.25
ANGLE ±0.5°		<b>CHECKED</b>	Sidong Luo 2024.01.25
LINEAR TOLERANCE ±0.05	<b>MATERIAL</b>	<b>APPROVED</b>	Kendy Lee 2024.01.25
X.X	<b>COLOUR</b>		
<b>A3</b>			
		<b>SCALE:</b>	1.000
		<b>UNIT:</b>	MM
		<b>REV:</b>	A1
		<b>SHT:</b>	1/1