


REV	DESCRIPTION	DATE	ECN NO.
△	INITIAL RELEASE	2024.01.25	



Tolerances unless otherwise specified	
Length	Tolerances
L≤0.5m	-0mm, +50mm
0.5m<L≤5m	-0mm, +100mm
5m<L≤20m	-0mm, +150mm
L>20m	+1%

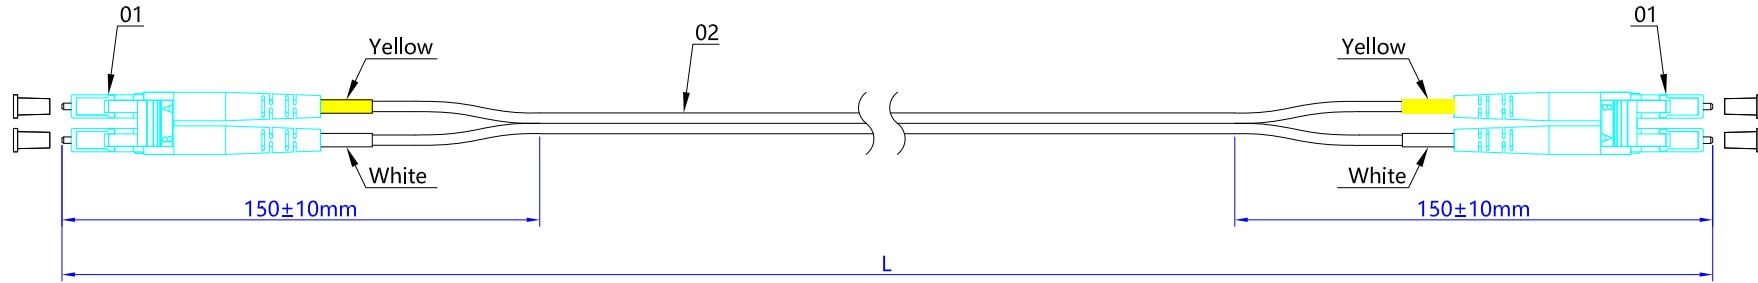

Technical Requirements

- 1.Fiber: OM3 MultiMode.
- 2.Polishing type: LC/UPC.
- 3.Insertion loss: ≤0.30dB.(850/1300nm)
- 4.Return Loss: ≥30dB.(850/1300nm)
- 5.Standards:
 - IEC 61300-3-35, endface inspection.
 - IEC 61300-3-4, IL measurement procedures.
 - IEC 61300-3-6, RL measurement procedures.
- 6.The length L is customized.

6			
5			
4			
3			
2	Ø2.0mm MM OM3 Duplex Aqua LSZH Cable	L	
1	Ø2.0mm LC/UPC MM Duplex Aqua Connector(Aqua Boot)	2	
NO.	DESCRIPTION	Q'TY	MAT'L NO.

CONFIDENTIAL		 KOC Communication Co., Ltd.	
Information in this drawing is property of KOC and may not be copied, reproduced or disclosed to any third unexpected party without written consent by KOC.		PART NAME	Ø2.0mm LC/UPC-LC/UPC Duplex OM3 Patchcord
		PART NUMBER	/
TOLERANCES	DRW NUMBER	D R A W N	xiwei Zhang 2024.01.25
ANGLE ±0.5°		CHECKED	Sidong Luo 2024.01.25
LINEAR TOLERANCE ±0.05	MATERIAL	APPROVED	Kendy Lee 2024.01.25
A3		COLOUR	N/L
		SCALE:	1.000
		UNIT:	MM
		REV:	A1
		SHT:	1/1