

Data sheet

Part No.	MIK WH
Description	mini trunking, single compartment UV-stable
Colour	white, similar to RAL 9010
Fire Behaviour	non flame propagating

PVC-LSF 




Standard: EN 50085, BS 4678 Part 4



Length	Operating temperature	Material
3000 mm	-5 to +60 °C	PVC

Art. no.	Height x Width	ps	pl
106 601 MIK 10/16 3/20 WH	10 x 16 mm	3 m	60 m
106 602 MIK 16/16 3/20 WH	16 x 16 mm	3 m	60 m
106 603 MIK 16/25 3/20 WH	16 x 25 mm	3 m	60 m
106 604 MIK 16/40 3/20 WH	16 x 40 mm	3 m	60 m
106 605 MIK 25/40 3/10 WH	25 x 40 mm	3 m	30 m
106 606 MIK 25/40/2 3/10 WH	25 x 40 mm	3 m	30 m
106 607 MIK 40/40 3/10 WH	40 x 40 mm	3 m	30 m
106 608 MIK 40/60 3/10 WH	40 x 60 mm	3 m	30 m

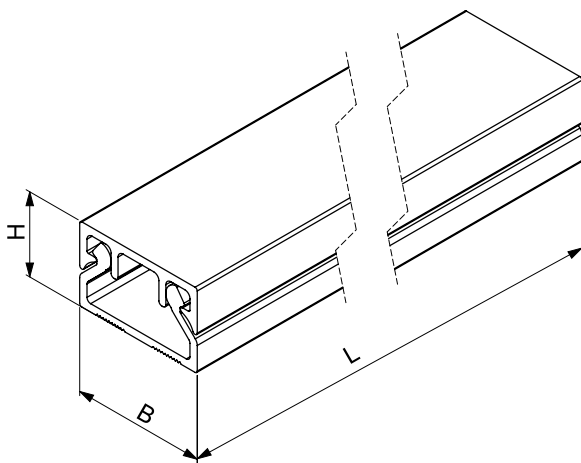

For sale in the UK market only.