


Data Sheet

Item Code:	SLS
Description:	Starline trunking, compression resistance > 1250 N, non flame propagating
Properties:	for the supply of power, data and telecommunication cabling, versatile system in three standard trunking assemblies, all with three fully segregated compartments, further segregation of services possible by using trunking dividers, special clip-on system for robust connections between trunking body and lid (shock- and child-proof).
Colour:	white, similar to RAL 9010
Relevant Standard:	EN 50085, BS 4678 Part 4

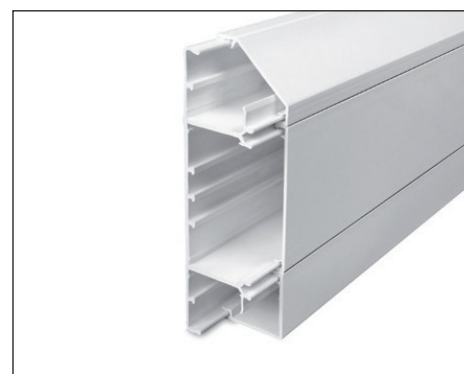

Material	Temperature Range	UV Stabilisation
PVC	-25 °C/+60 °C	yes

Package Quantity [m]:

Item Code	Small Package	Large Package
SLS 50x170	3	180
SLS 50x250	3	180