


# Toolless Trumpet Drop-Out Kit for Fiber Routing System, 240 mm (10 in.)

MODEL NUMBER: SRFC10DROP

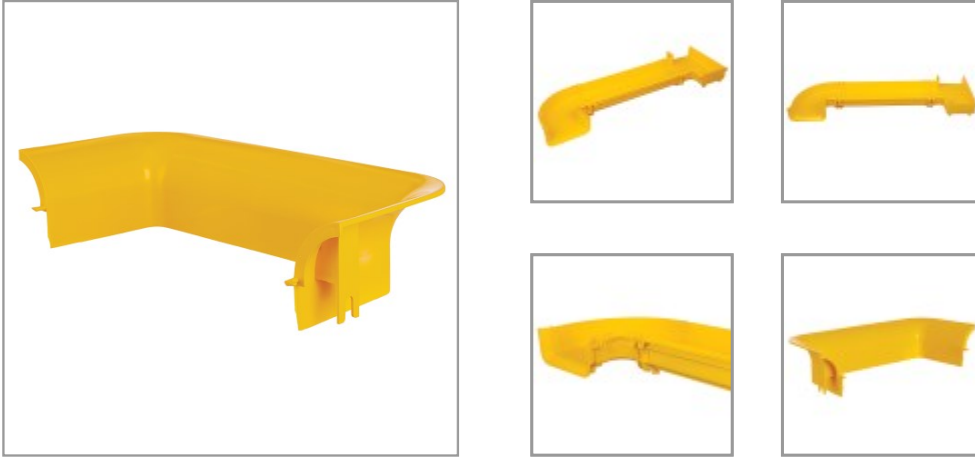

Raceway trumpet spillout narrows your fiber optic cables to a standard 2 in. bend radius when exiting a channel or vertical T.

## Features

**High-Impact PVC Drop-Out Helps You Create Custom Fiber Cable Routing Schemes**The SmartRack® SRFC10DROP limits the bend radius of your fiber optic cabling to two inches (50 mm) as it exits from a channel, horizontal T fitting or vertical T. A proper two-inch bend radius protects against signal loss and damage to the cables. Made from durable, lightweight PVC material, this trumpet drop-out connects using the included hardware to help keep your cable bundles neat and organized. Screws and nuts tighten by hand with no tools required to complete a professional, finished look in your data center, network closet or industrial space.

## Highlights

- Allows you flexibility in creating your custom fiber optic cable routing system
- Constructed from durable but lightweight PVC plastic
- Easy to install with your fiber routing system with no tools needed

## Applications

- Create a fiber routing system along the wall or ceiling of your data center or network closet or across the tops of the rack enclosures

## System Requirements

Requires a 10 in. or 240 mm wide section from Fiber Routing System

## Package Includes

- Trumpet dropout, 240 mm
- (4) T-shaped screws
- (4) Twist nuts
- Installation guide

## Specifications

| OVERVIEW                               |                              |
|--|------------------------------|
| UPC Code                               | 037332240910                 |
| Product Type                           | Dropout                      |
| Accessory Type                         | Cable Management Accessories |
| Cable Management System Component Type | Drop Out/Waterfall           |
| PHYSICAL                               |                              |
| Color                                  | Yellow                       |
| Shipping Dimensions (hwd / in.)        | 2.95 x 12.79 x 5.70          |
| Shipping Weight (kg)                   | 0.54                         |
| Unit Dimensions (hwd / in.)            | 4.920 x 11.020 x 2.700       |
| Unit Dimensions (hwd / cm)             | 12.496 x 27.990 x 6.858      |



Powering Business Worldwide



|                                     |                         |
|-------------------------------------|-------------------------|
| Unit Weight (lbs.)                  | 0.630                   |
| Unit Weight (kg)                    | 0.29                    |
| <b>STANDARDS &amp; COMPLIANCE</b>   |                         |
| Product Compliance                  | RoHS; EIA/ECA-310-E     |
| <b>WARRANTY &amp; SUPPORT</b>       |                         |
| Product Warranty Period (Worldwide) | 5-year limited warranty |

1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
<https://tripplite.eaton.com>

© 2024 Eaton. All Rights Reserved.  
Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.