


Voice Panel

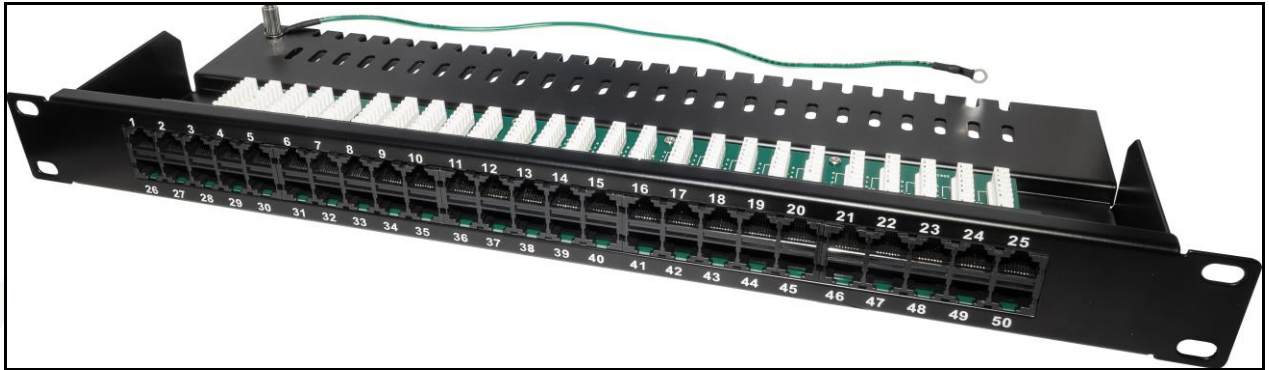

50 Port Voice Panel (FFv50C2)

These panels are the ideal choice for installations with 25, 50 or 100 pair cable. They are easy to terminate with rear metal cable management tray and are designed for 19" cabinets.

Features:

- 50 way 1U high density format
- 6 vertical Krone LSA+ type IDC connectors per RJ45
- Multiple cable mounting lugs
- Supplied with earthing cable, push fit cage nuts and cable ties
- Gold plating on RJ45 contacts
- Meets TIA/EIA-568-A and TIA/EIA-568-B
- Meets ISO/IEC Generic Cabling Standard 11801

Specifications:

- Weight:
 - With packaging: 1710g approx..
 - Without packaging: 1564g approx.
- Dimensions: 535 x 194 x 52mm
- Colour: Black
- Materials:
 - Frame: carbon steel, 1U
 - IDC: PBT UL94V-0, accepts 22-26 AWG solid wire
 - PCB: FR4 1.6mm(0.04") thickness, 2 layer
 - Contact: 0.45mm (0.018") diameter phosphor bronze with 6 μ "/0.1524 μ m gold plating


- **Electrical Specifications:**
 Current rating: 1.5A Max.
 Voltage rating: 150V
 Contact resistance: 20mΩ
 Insulation resistance: 500MΩ
 Dielectric withstand voltage: 1000V AC RMS, 60Hz 1 min.

Packaging: packed individually in white cartons, then in boxes of 10.

Commodity code: 85369010


EAN: 5055386510068

Country of Origin: China

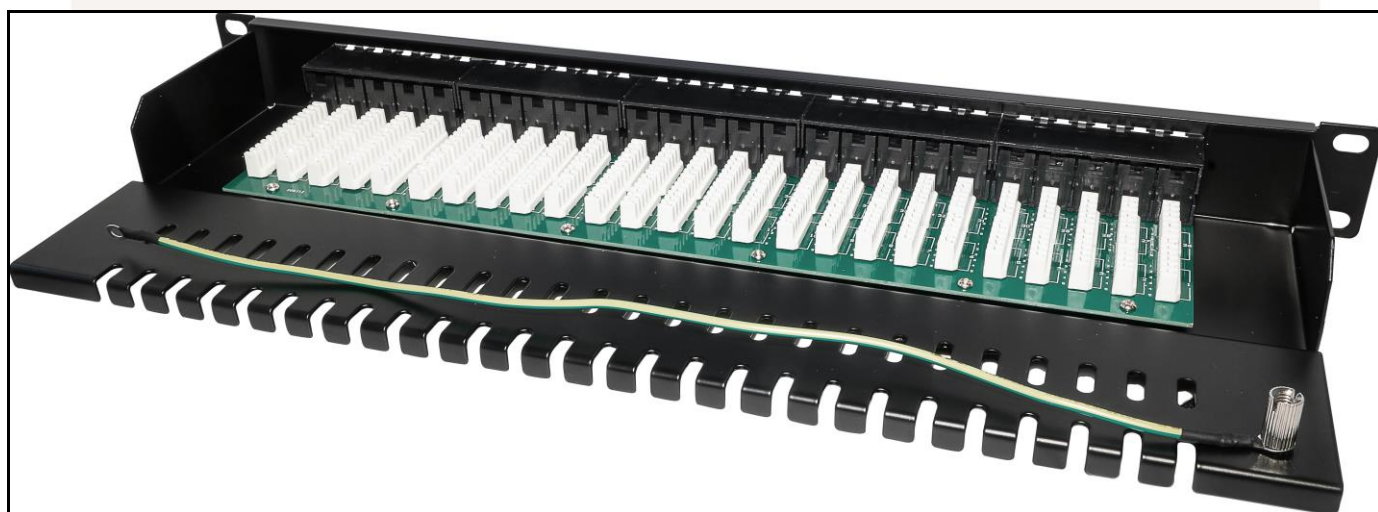

Wiring information

RJ45	IDC
1	1
2	2
3	3
6	4
4	5
5	6
7	-
8	-

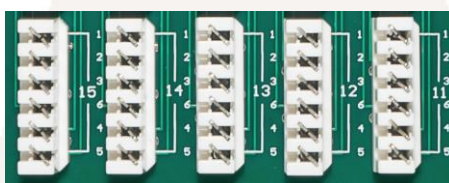

25/04/2022